


NUURA

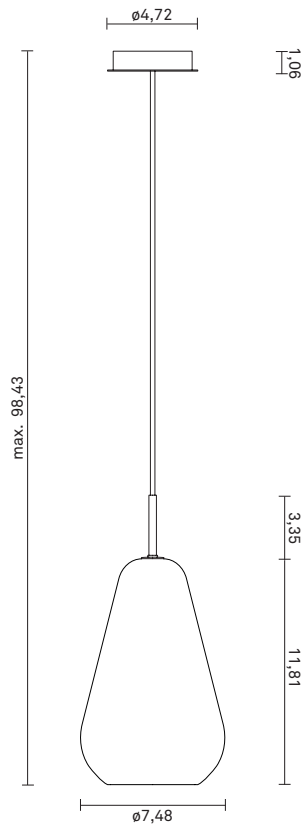

ANOLI 1 - Medium - Opal

Design: Sofie Refer, 2018. US-model.

Anoli 1 - Medium in mouth blown Gold glass and Nordic Gold finish.

Anoli Collection captures the tranquility of falling water droplets. The elegant droplets and golden warmth are the essence of the sophisticated pendant collection Anoli.

The elegant yet simple drop shape is emphasized by the finest mouth blown glass and light gold metal.

The collection ranges from sleek pendants to elegant chandeliers and can be customised for larger projects and private homes.

Anoli 1 - Medium works perfectly as a single pendant or more pendants in lines or grouped over a table or desk.

Anoli collection:

The Anoli collection include the following products:

- Anoli 1 - Small
- Anoli 1 - Small / Opal
- Anoli 1 - Medium
- Anoli 1 - Medium / Opal
- Anoli 3
- Anoli 3 / Opal
- Anoli 6
- Anoli 13

NUURA

TECHNICAL INFO

Product no.: 97330124

Type: Suspension - Indoor

Colour:

Glass: Opal
Metal: Nordic Gold
Cable: White

Materials:

Powder coated metal
Mouth-blown glass
Fabric covered cable

Dimensions:

ø7,48in x 15,16in
Ceiling plate: ø4,72 x 1,97
Fabric cable - Length: 98,43


Product weight:

Product incl. ceiling plate: 1255 g
Ceiling plate: 265 g

Packaging:

Dimensions: L: 10in x W: 10in x H: 18,94in
Weight: 916 g
Total weight incl. product: 2171 g
Number of parcels: 1
Material: Brown cardboard.

Included ceiling plate:

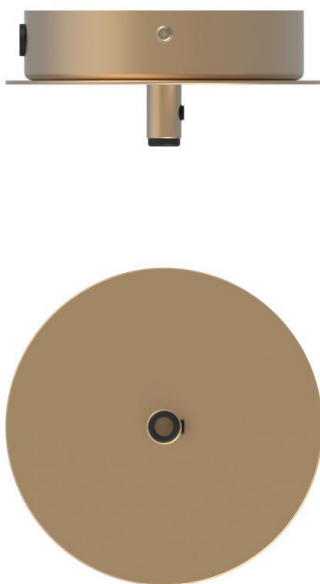

Packaging - weight - material:

Cardboard outside: 598 g
Cardboard inside: 289 g
Bubble wrap: 25 g
Plastic bag: 4 g

Cleaning:

Use a soft dry cloth to clean the product.
Do not use household cleaners.

Certifications and labels:

CE - CE-certified
IP20 - IP20
□ - Class II

This fixture is fabricated with UL rated components, but the fixture itself is not UL listed. This option may be available for an additional fee.

Light source:

Socket: G9
Max wattage: 7W LED (Bulb not included)
Voltage (V): 120V

Recommended light source:


Equivalent to Illumination G9 (344-47), 5.6W

Dimmability:

Can be fitted with an aligned dimmer.

DALI compatible

Light calculations:

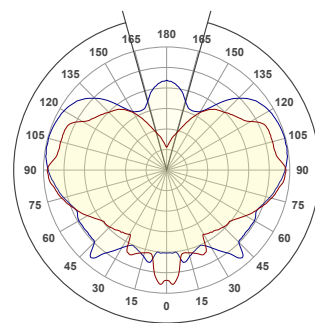

Distance	Beam width
1m 3,3 ft	42 lx 4 fcd n/a m n/a ft
2m 6,6 ft	10 lx 1 fcd n/a m n/a ft
3m 9,8 ft	5 lx 0 fcd n/a m n/a ft
4m 13,1 ft	3 lx 0 fcd n/a m n/a ft
5m 16,4 ft	2 lx 0 fcd n/a m n/a ft